

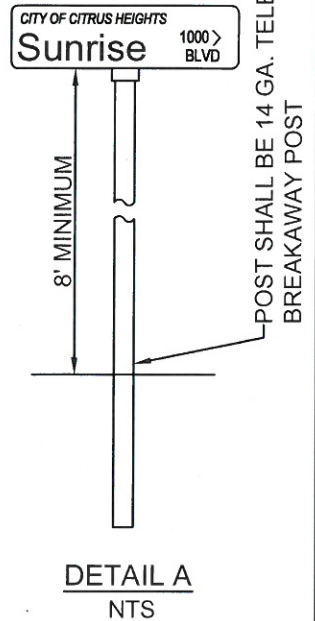
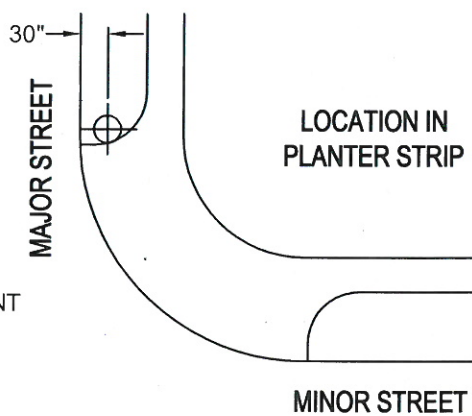
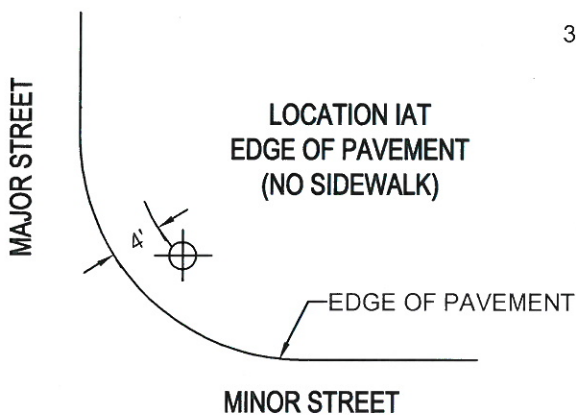


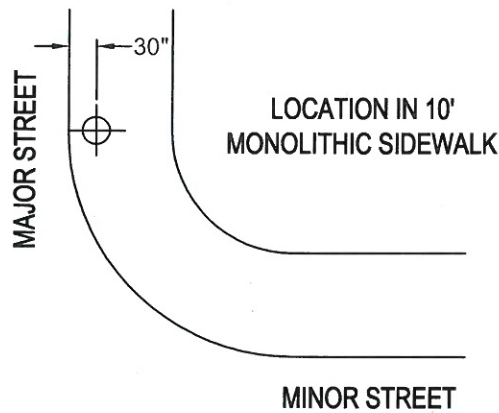

CITY OF CITRUS HEIGHTS GENERAL SERVICES DEPARTMENT

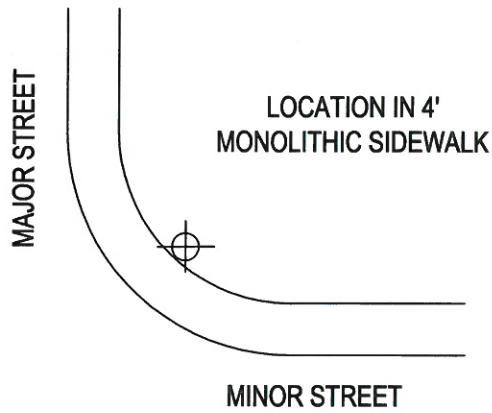

NOTES:

- 1 - Street name sign to be located 30 inches from face of curb or back of four (4) feet monolithic sidewalk at mid-return.
- 2 - Bottom of street name sign to be mounted eight (8) feet above ground or sidewalk per detail "A" shown on this sheet except, when stop sign is mounted on same post, bottom of stop sign shall be mounted seven (7) feet above ground or sidewalk and street name sign to be mounted directly above stop sign. In no case shall the bottom of the lowest sign be less than seven (7) feet above ground or sidewalk level.
- 3 - Street name sign to be mounted with Hawkin's heavy duty aluminum "Vandal Proof" (HD) VP Model V14F-(HD)VP-2C2P (without finial) or approved equal.
- 4 - Street name signs mounted on signal standards or electrollers shall be mounted with Hawkin's "Vandal Proof" wing bracket model V14F-(HD)VP-AB or approved equal. Brackets shall be fastened to poles with two (2) 3/4" wide x 0.030" thick type 201 stainless steel bands with heavy duty buckle and a minimum of two (2) vandal proof screws.

APPROVED BY:

Stuart Hodgkins

STUART HODGKINS, ACTING CITY ENGINEER

STREET NAME SIGN LOCATION AND INSTALLATION DETAIL

APPROVAL DATE: 5-7-12

SCALE: NONE

DRAWN BY: Jing Le Liu

CD - 01B